

Dynamic In Motion Axle Weighing




TA MAR

IN-MOTION VEHICLE SCALE

Rinstrum's axleWEIGHr is a fast, accurate and economical way to monitor commodities that are coming into or leaving your facilities.

Drive over the scale while moving a constant 2-3 mph. The scale will automatically weigh each axle and can print a receipt with individual axle weights and the total GVWR ideal for CoR requirements. If you store the trucks ID and tare weight, or use 2 pass weigh in weigh out weighing, the controller will calculate the Gross, Tare and Net values.

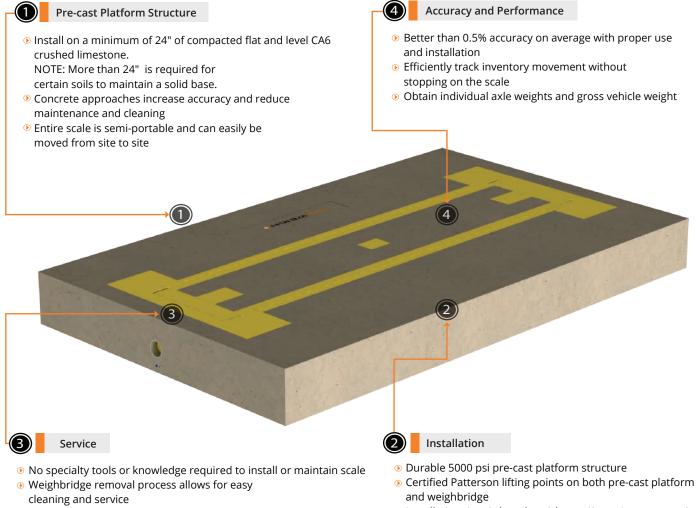

- Ioped floor and 4" drain keep scale clean and dry
- Installation time is less than 8 hours (2 men) on average install precast platform from beginning to end

Electronics Accessories



Indoor Unit





Information Management Software



Truck Clicker system




D841 remote with built in traffic lights

**Ethernet, M12 connected, RS232/485

Accurate


On average better than \pm 0.5% accuracy can be expected. Company testing as well as extensive field trials have shown that with extended flat and level concrete approaches \pm 0.2% or better accuracy can be achieved on average. Individual results may vary. Well maintained vehicles weigh the best.

Installation Recommendations

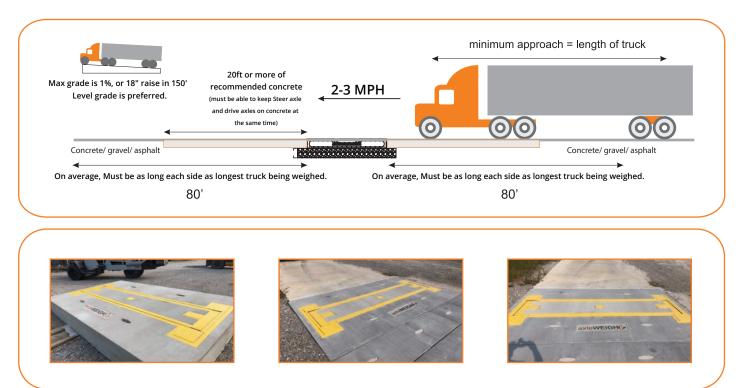

Patent Number: 9470574

Operation



Two Pass Weighing - Weigh In and Weigh Out

INBOUND

Press the TRUCK key, select Truck ID then OK, or press CLICKER Drive over the scale **OUTBOUND** Press the TRUCK key, select Truck ID then OK, or press CLICKER Drive over the scale



Single Pass Weighing With Known Tare Weight

Press the TRUCK Key Enter Truck ID to recall a stored Tare Weight then OK or press Clicker. Drive over the scale

Capacity	50,000 lbs per axle
Display Resolution	20 lbs
Operating Speeds	Structurally certified for "in road use" at 40 mph up to 50,000 lbs Recommended speed 2-3 mph Speed error above 5 mph
Overload	150% (for 33,000 lb load cells)
Scale	
Precast Scale Module	Dimensions: 13'6" x 8'5" x 14" Weight: 19,700 lbs
Scale Weighbridge	Dimensions: 12'2" x 4'1" x 7.75" Weight: 2,100 lbs Drop wall versions available.
Load Cell Assembly	Outboard, In-tension cradle assembly, self-contained
Load Cells	4 x 33,000 lbs rocker compression/tension load cells. Stainless steel, hermitically sealed, IP69 ingress protection, M12 watertight connectors
Site Requirements - Customer Provided	
Approach	Based on average trucks,a poured 20' minimum concrete approach either side of the scale to improve accuracy. Recommended one truck length on either side of the scale with flat level approaches in concrete, gravel or asphalt.
Foundation	Determined after an Engineering Geo Test
Indicator	
Power	AC/DC options, 110V-240VAC, 12VDC-24VDC Input
Output	RS232, RS485, Ethernet TCP, USB support, I/O options
Software	LUA enabled -MAX application programmability options, Information Management Software
Remote Display	
Display	4" alphanumeric characters, Traffic lights - Red/ Green
Power & Comms	AC/DC options, 110V-240VAC, 12VDC-24VDC Input, RS232, RS485 or Ethernet option



Authorized Distributor

AUSTRALIA

Rinstrum Pty Ltd Unit 4/31 Henry Street Loganholme QLD 4129 Australia

Ph: +61 7 3216 7166 Email: sales.au@rinstrum.com

USA

Rinstrum Inc 1349 Piedmont Drive Troy, Michigan 48083 United States

Toll Free 1 877 829 9152 Ph: +1 248 680 0320 Fax: +1 248 499 1331 Email: sales.us@rinstrum.com

www.axleweighr.com

EUROPE

Rinstrum Europe GmbH Hans-Böckler-Straße 42 D-40764 Langenfeld Germany

Ph: +49 (0)2173 16562-10 Fax: +49 (0)2173 16562-29 Email: sales.eu@rinstrum.com