

Accessories


HM-9-401

Alloy steel mounting kit assembled with: H9C, B9C.



Short description

- Compact construction, easy installation.
- Excellent anti-reversal ability.
- Using under heavy static load or light dynamic load.

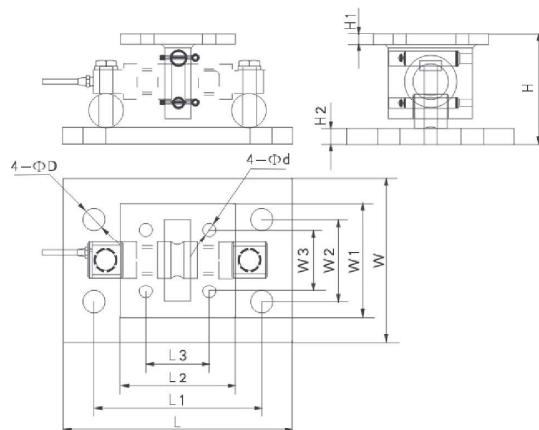

Capacity	Part number
5klb–20klb	HM-9-401-5/20K
30klb–75klb	HM-9-401-30/75K
100klb	HM-9-401-100K
150klb	HM-9-401-150K
200klb–250klb	HM-9-401-200/250K

Specification	
Safety loading	150%FS
Ultimate loading	300%FS
Max. anti-reversal loading	40%FS
Max. anti-side loading	20%FS
Max. vertical lifting	5–20K:3.3K(1.5t)/ 30–75K:11K(5t) 100–150K:16.5K(7.5t)/ 200–250K:68K(31t)

Dimension Capacity (klb)	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	D	d
5–20klb	279.4 (11)	203.2 (8)	139.7 (5.5)	76.2 (3)	203.2 (8)	139.7 (5.5)	101.6 (4)	76.2 (3)	139.2 (5.48)	12.7 (0.5)	19 (0.75)	26.9 (1.06)	16 (0.63)
30–75klb	381 (15)	292.1 (11.5)	203.2 (8)	130.3 (5.13)	254 (10)	203.2 (8)	152.4 (6)	130.3 (5.13)	214.1 (8.43)	19.1 (0.75)	25 (1.0)	31 (1.22)	19.1 (0.75)
100–150klb	57.2 (18)	355.6 (14)	254 (10)	190.5 (7.5)	304.8 (12)	254 (10)	228.6 (9)	190.5 (7.5)	264 (10.39)	31.8 (1.25)	31.8 (1.25)	35.1 (1.38)	20.6 (0.81)
200–250klb	660.4 (26)	508 (20)	304.8 (12)	228.6 (9)	304.8 (12)	304.8 (12)	152.4 (6)	228.6 (9)	400 (15.73)	50.8 (2)	50.8 (2)	47.8 (1.88)	26.9 (1.06)


BM-9-402

Alloy steel mounting kit assembled with: H9C, B9C.



Short description

Compact construction, easy installation.
Excellent anti-reversal ability.
Using under heavy static load or light dynamic load.
Stainless steel, with good ability against corrosive environments.

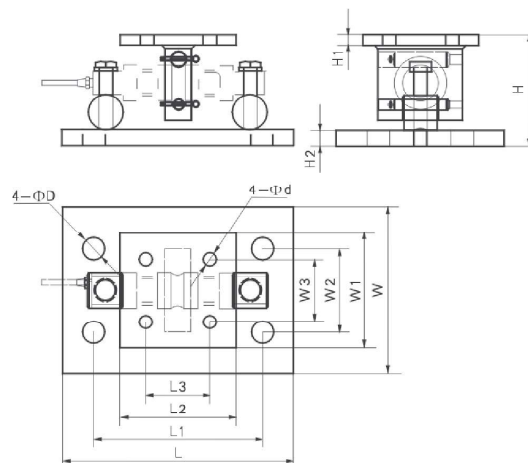

Capacity	Part number
5klb–20klb	BM-9-402-5/20K
30klb–75klb	BM-9-402-30/75K
100klb	BM-9-402-100K
150klb	BM-9-402-150K
200klb–250klb	BM-9-402-200/250K

Specification	
Safety loading	150%FS
Ultimate loading	300%FS
Max. anti-reversal loading	40%FS
Max. anti-side loading	20%FS
Max. vertical lifting	5–20K:3.3K(1.5t)/ 30–75K:11K(5t) 100–150K:16.5K(7.5t)/ 200–250K:68K(31t)

Dimension Capacity (klb)	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	D	d
5–20klb	279.4 (11)	203.2 (8)	139.7 (5.5)	76.2 (3)	203.2 (8)	139.7 (5.5)	101.6 (4)	76.2 (3)	139.2 (5.48)	12.7 (0.5)	19 (0.75)	26.9 (1.06)	16 (0.63)
30–75klb	381 (15)	292.1 (11.5)	203.2 (8)	130.3 (5.13)	254 (10)	203.2 (8)	152.4 (6)	130.3 (5.13)	214.1 (8.43)	19.1 (0.75)	25 (1.0)	31 (1.22)	19.1 (0.75)
100–150klb	57.2 (18)	355.6 (14)	254 (10)	190.5 (7.5)	304.8 (12)	254 (10)	228.6 (9)	190.5 (7.5)	264 (10.39)	31.8 (1.25)	31.8 (1.25)	35.1 (1.38)	20.6 (0.81)
200–250klb	660.4 (26)	508 (20)	304.8 (12)	228.6 (9)	304.8 (12)	304.8 (12)	152.4 (6)	228.6 (9)	400 (15.73)	50.8 (2)	50.8 (2)	47.8 (1.88)	26.9 (1.06)