

B9N



- Stainless steel construction, dual shear beam structure, adhesive sealed, compression loading available.
- Ingress Protection (according to EN 60529): IP67
- Suitable for electronic truck scales, hopper scales, track scales and other electronic weighing devices.


Available models

Capacity	Accuracy	Full article description
xxklb	C3	B9N-C3-xxK-9B

Specification


Maximum capacity (Emax)	klb	10/15/20/25/30/40/50/60/75/100/125
Accuracy class		C3
Maximum number of verification intervals	N.max	3000
Maximum number of load cell intervals (nLC)	vmin	Emax/10000
Combined error	%FS	± 0.020
Creep	%FS/30min	± 0.016
Temperature effect on sensitivity	%FS/10°C	± 0.011
Temperature effect on zero	%FS/10°C	± 0.015
Output sensitivity (= FS)	mV/V	3.0 ± 0.003
Terminal resistance, input	Ω	700 ± 7
Terminal resistance, output	Ω	703 ± 4
Insulation impedance	MΩ	≥ 5000(50VDC)
Zero balance	%FS	± 1.0
Temperature, compensated	°C	-10~+40
Temperature range, operating	°C	-35~+70
Excitation, recommended voltage	V	5~12(DC)
Excitation maximum	V	18(DC)
Safe overload	of Emax	150
Ultimate overload	of Emax	300

Dimensions in mm

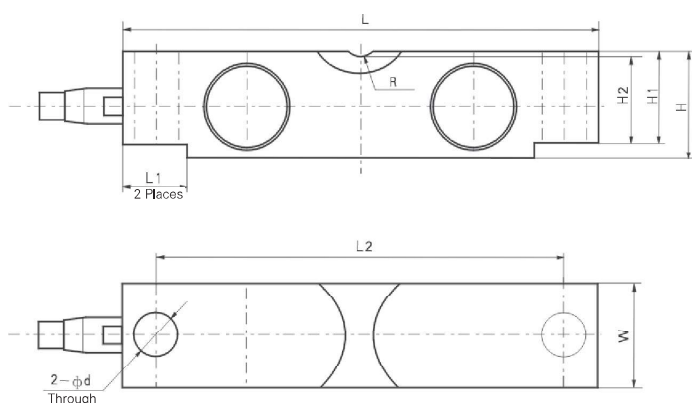

Dimension Capacity (klb)	L	L1	L2	H	H1	H2	Φd	W	R
10~25klb	197 (7.8)	35 (1.4)	165 (6.5)	49.3 (1.9)	43.2 (1.7)	41.4 (1.6)	Φ17.3 (0.7)	43 (1.7)	R19.1 (0.8)
30~40klb	260.4 (10.3)	49 (1.9)	216 (8.5)	62 (2.44)	53.3 (2.1)	50.8 (2.0)	Φ20.6 (0.8)	49.3 (1.9)	R25.4 (1.0)
50~75klb	260.4 (10.3)	49 (1.9)	216 (8.5)	74.7 (2.9)	67.3 (2.65)	64.5 (2.5)	Φ26.9 (1.1)	62 (2.4)	R25.4 (1.0)
100~125klb	387.4 (15.3)	79.5 (3.1)	324 (12.8)	98 (3.9)	87.1 (3.4)	83.8 (3.3)	Φ41.2 (1.6)	73.7 (2.9)	R38.1 (1.5)

Wiring

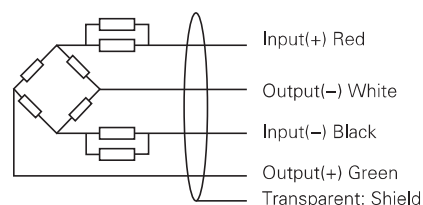

- Adopt shielded, 4 conductor cable: Φ5mm
- Standard cable length: 9m.