

BM3



test certificate no. D09-08.01 C of C no
R60/2000-DE1-10.08



Certificate no. 06-099A1

- Stainless steel IP68 "S" type load cell
- Tension and compression applications
- Suitable for hanging, hopper and other weighing devices


Available models

Capacity	Accuracy	Full article description
50 kg	C3	BM3-C3-50kg-6B
100 kg	C3	BM3-C3-100kg-6B
150 kg	C3	BM3-C3-150kg-6B
200 kg	C3	BM3-C3-200kg-6B
250 kg	C3	BM3-C3-250kg-6B
500 kg	C3	BM3-C3-500kg-6B
1.0 t	C3	BM3-C3-1.0t-6B
2.0 t	C3	BM3-C3-2.0t-6B
3.0 t	C3	BM3-C3-3.0t-6B
4.0 t	C3	BM3-C3-4.0t-6B
5.0 t	C3	BM3-C3-5.0t-6B
6.0 t	C3	BM3-C3-6.0t-6B
7.5 t	C3	BM3-C3-7.5t-6B

Specification


Accuracy class		OIML R60 C3	
Output sensitivity (= FS)	mV/V	2.0 ± 0.004	
Maximum capacity (Emax)	t	0.5, 1, 2, 2.5, 3, 4, 5, 6, 7.5	
Maximum number of load cell intervals (nLC)		3000	
Ratio of minimum LC verification interval Y = Emax / vmin		7500	12000
Combined error	%FS	± 0.02	
Minimum dead load	kg	0	
Safe overload	of Emax	150 %	
Ultimate overload	of Emax	300 %	
Zero balance	%FS	± 1.5	
Excitation, recommended voltage	V	5 ~ 12(DC)	
Excitation maximum	V	18(DC)	
Terminal resistance, input	Ω	350 ± 3.5	
Terminal resistance, output	Ω	350 ± 3.5	
Insulation impedance	MΩ	≥ 5000 (at 50VDC)	
Temperature range, compensated	°C	-10 ~ +40	
Temperature range, operating	°C	-35 ~ +65	
Storage temperature	°C	-40 ~ +80	
Element material		Stainless steel	
Ingress Protection (according to EN 60529)		IP68	
ATEX classification (optional)		II1G Ex ia IIC T4	II1D Ex iaD 20 T73°C II3G Ex nL IIC T4

Dimensions in mm

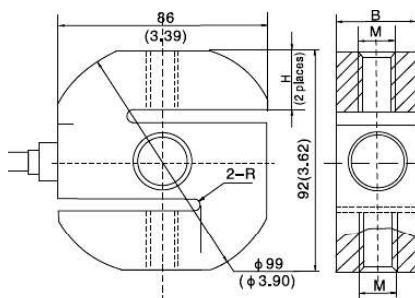

Capacity(t)	0.5t, 1t	2t, 2.5t, 3t	4t	5t, 6t, 7.5t
Dimension				
W	32 (1.26)	32 (1.26)	36 (1.42)	50 (1.97)
H	25 (0.98)	25 (0.98)	25 (0.98)	26 (1.02)
M	M12 x 1.75	M20 x 1.5	M20 x 1.5	M24 x 2

Wiring



- Shielded, 4 conductor cable.
- Cable diameter: Φ5mm
- Standard cable length for 500kg: 3m and for all other capacities: 6m.
- Shield not connected to element